


**Exclusive  
Smooth Transition  
Function (STF)  
Technology**

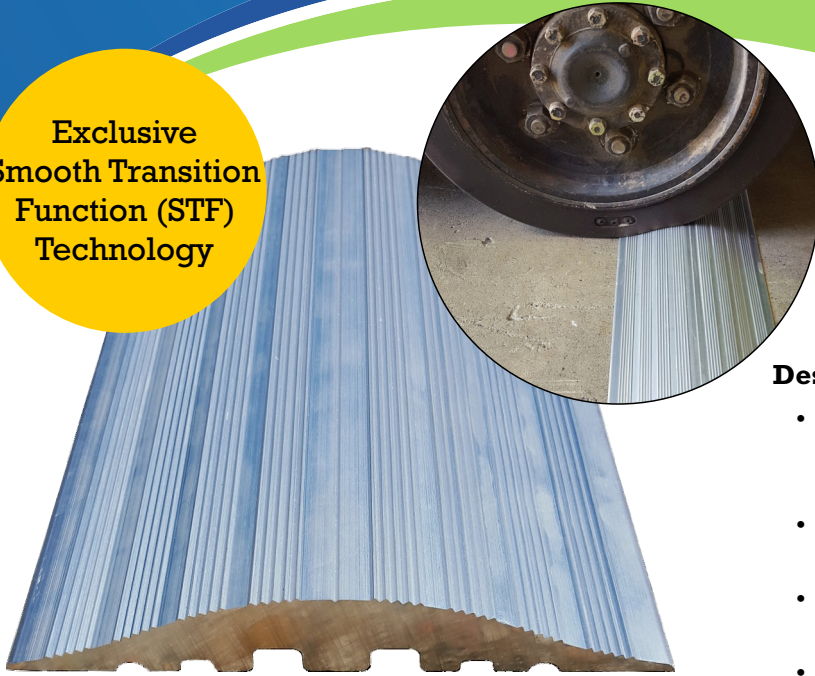

SpillSmart Aluminium Floor Bunding is a great solution for when a long term more permanent bunding solution is required. The profile of the bund has been specifically designed to ensure vehicles experience smooth transitions when driving over the bund. From forklift to truck this feature takes the jolt out of driving in and out of the banded area. It is also a preferred option for bunding facilities storing hazardous chemicals and is compliant to AS1940-2017.

Manufactured from Marine Grade Aluminium its properties provide a high level of resistance to corrosion, is fire resistant, non-sparking, non-magnetic and has the strength to withstand high volume heavy vehicle traffic area's. The bunding capacity comes from a 30cm height with a generous 200mm width providing a stable surface area and is dispatched in 1.2m pre-drilled lengths. This Floor Bunding solution is first class and is a true market leader.

### Designed for:

- Storage facility's containing class 3 Dangerous goods including paints, gasoline, acetone, adhesives, ethanol and methanol
- Warehouse driveways, internal & external access openings
- Busy traffic area's including heavy vehicles and trucks
- Wash Bays

### Features:

- Marine grade aluminium - delivers long life durability, strength and endurance to handle heavy vehicle traffic
- Bunding capacity - designed with a 30mm height with a generous 200mm width for added stability
- Smooth Transition Function (STF) technology - provides smooth transitions for forklifts and vehicles
- Traction grooves - for greater grip
- Fire Resistant, non-sparking and non-magnetic - will bund both hazardous and non-hazardous liquids
- Instruction guide – Easy to follow step by step installation procedure

ES-B-FB-A	SpillSmart Aluminium Floor Bunding 200mm (W) x 30mm (H) x 1200mm (L)
-----------	---

